
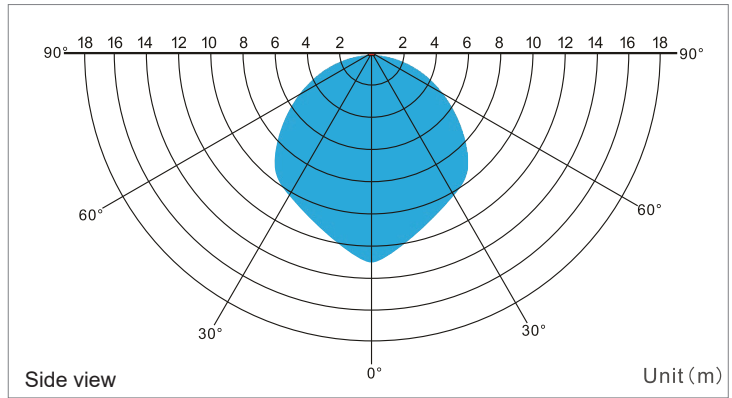


Sensing range

Ceiling: 5-8m high, 5-6m radius

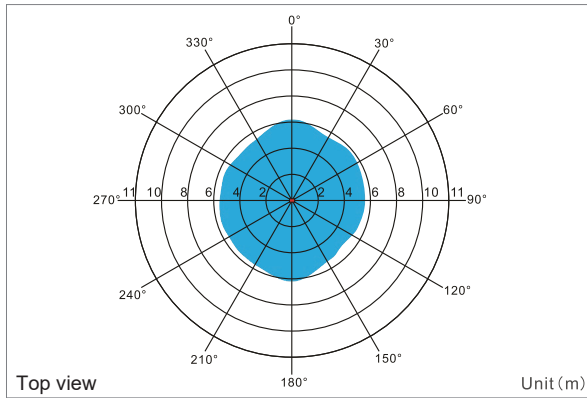

Sensor function

Function modes:

- 1. sensor active mode (sensing ON).
- 2. sensor inactive mode (sensing OFF).

Activating sensor:

- Step 1: Press the AUTO button.
- Step 2: Select the desired functions.

To inactivate the sensor:

Press ON/OFF button.


Description of remote control keys

ON/OFF
The light will always keep on/off state.

Hold time
Change the delay time
10s: 10±3sec
10min: 10±1min
20min: 20±2min
30min: 30min±3min

Stand-by period
change keep-on delay time
1min: 1min±10s
5min: 5min±30s
30min: 30±3min
+∞: unlimited standby period

- Factory settings:**
1. AUTO
 2. Detection range : 100%
 3. Stand-by dimming level : 10%
 4. Daylight sensor: 30lux
 5. Stand-by period: +∞
 6. Hold time : 10min

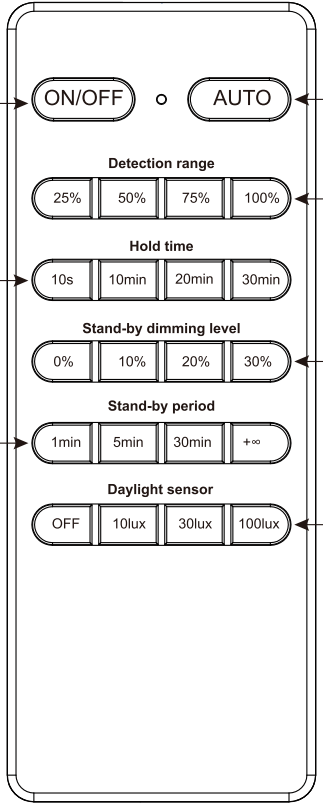

AUTO
Open sensing function

Detection range
25%: 25% range
50%: 50% range
75%: 75% range
100%: 100% range

Stand-by dimming level
Change keep-on brightness
0%: Standby brightness 0%
10%: Standby brightness 10%
20%: Standby brightness 20%
30%: Standby brightness 30%

Daylight sensor
change the ambient light
OFF: The sensor can work during the day and night
10lux: <10Lux
30lux: <30Lux
100lux: <100Lux