

Installation must be installed by a qualified electrician (BS7671).  
Read before installation and retain for future reference.

Indoor or Outdoor use.

Always check for concealed pipes and cables before installation.

Wood or brick mounting surface.


1.8 - 2.5m Ground Clearance

240V-50Hz Incoming supply


Light Source: Not Included

• 1 x GLS E27 Max. 60W


• 1 x LED GLS E27

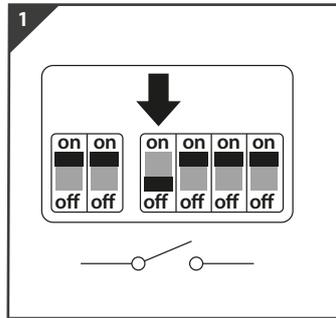


1 Switch OFF at mains supply before installing

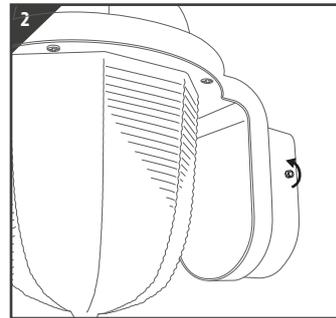


2 Slacken 2 lug screws from the fitting. Separate the mounting bracket from the fitting and wiring

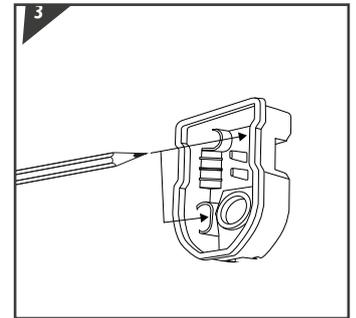


3 Ensure product is located in the correct location and mark the surface

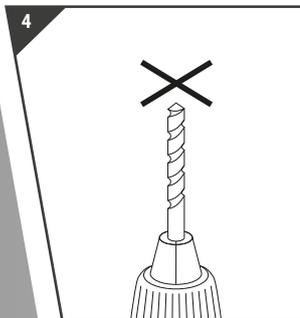


4 Use correct drill bit to the right depth

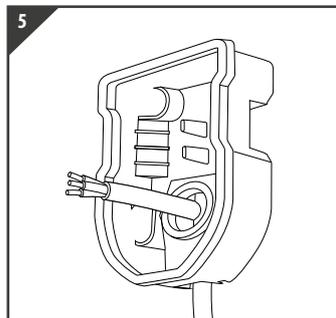


5 Thread the supply cable into the mount bracket before securing

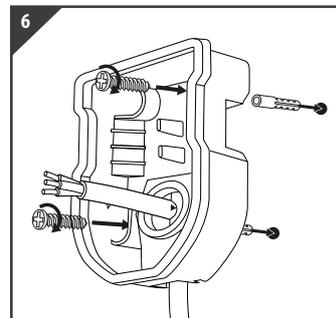


6 Secure the mount bracket to the surface

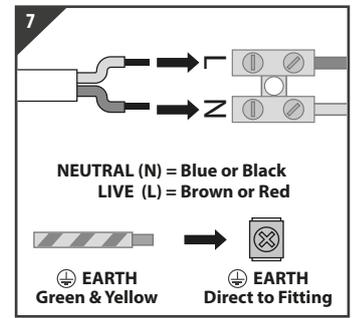


7 Insert correct supply (H05RN-F 1.0mm<sup>2</sup> core cable) into terminal block, tighten all screws in block. Product MUST be earthed.

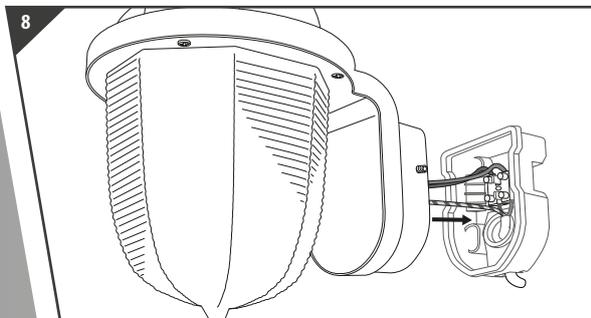


8 Place terminal block onto the securing pegs as the fitting is placed onto the mount bracket

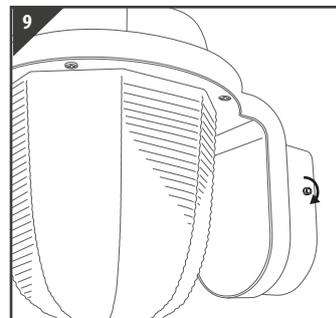


9 Secure fitting to bracket, do not over tighten the lug screws.

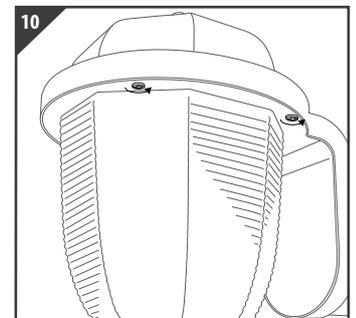


10 Hold light fitting casing whilst removal. Unscrew 4 securing screws and remove

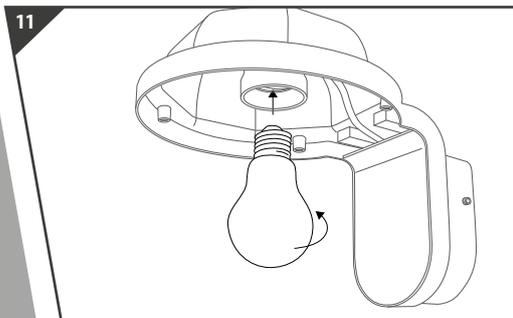

11 Insert correct wattage of GLS (E27 Cap) lamp into the fitting

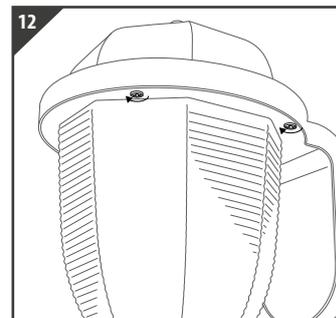

12 Return fitting casing, secure in place with all 4 screws, do not over tighten.

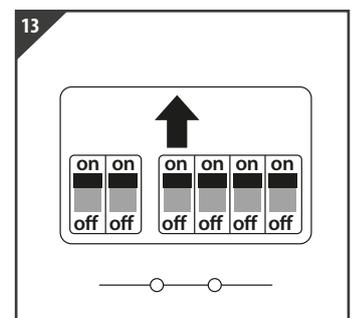

13 Return power. Switch ON at mains supply



**DO NOT MODIFY** – this will invalidate the warranty and could be dangerous.

Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice.