

## 36W LED TP<sub>a</sub> BACKLIT PANEL LIGHT

UGR < 19

600 x 600 x 35mm | TP(a)

SKU: S16731 - PB6X636WU194K  
S16732 - PB6X636WU195K  
S16733 - PB6X636WU196K

### INFORMATION

Measuring 595mm x 595mm x 35mm, this new LUMiLiFe 36W Backlit LED panel (UGR<19) light typically replaces 4 x 600mm T8/T5 fluorescent tubes lights set in 600 x 600 grids. Which is why they're the popular lighting choice for hotels, factories, offices, schools, colleges, hospitals and the like. Energy use will be reduced by up to 50% and you'll notice a dramatic improvement in light quality.

### FEATURES

- Lumens: 3600 + / - 5%
- Beam angle: 90 Degrees
- Life span: 50,000Hrs
- IP Rating: IP20
- Unified Glare Rating (UGR): <19\*
- CE, RoHS & UKCA Compliance
- Uniform Light Distribution
- TP(a)
- Non-Flicker Driver

\*this panel allows the installation to comply with EN12464

### TECHNICAL PARAMETER

- Input: 220-240V 50/60Hz
- Output Current: 900mA
- LED Type: SMD
- Output Power: 36W
- Diffuser Material: PS

### APPLICATIONS

- Hotels
- Conference/Meeting rooms
- Factories and offices
- Schools, colleges, universities and hospitals



#### 5 Year Warranty

This LUMiLiFe LED product comes with a 5 Year Warranty.




LUMiLiFe is constantly developing and improving its products. For this reason, all product descriptions are intended as a general guide and we may change specifications time to time in the interest of product development, without prior notification or public announcement. Data in this sheet has been obtained in controlled experimental conditions. However, LUMiLiFe cannot accept any liability arising from the reliance on such data to the extent permitted by law.



### SPECIFICATIONS

Model#	CCT	LED Type	Lumen (Lm) (±5%)	CRI	Beam Angle	Voltage (V)	PF	Weight (kg)
S16731 PB6X636WU194K	4,000K	SMD	3,600Lm	>80	90°	220-240V	>0.9	1.7
S16732 PB6X636WU195K	5,000K	SMD	3,600Lm	>80	90°	220-240V	>0.9	1.7
S16733 PB6X636WU196K	6,500K	SMD	3,600Lm	>80	90°	220-240V	>0.9	1.7

### DIMENSIONS (mm)

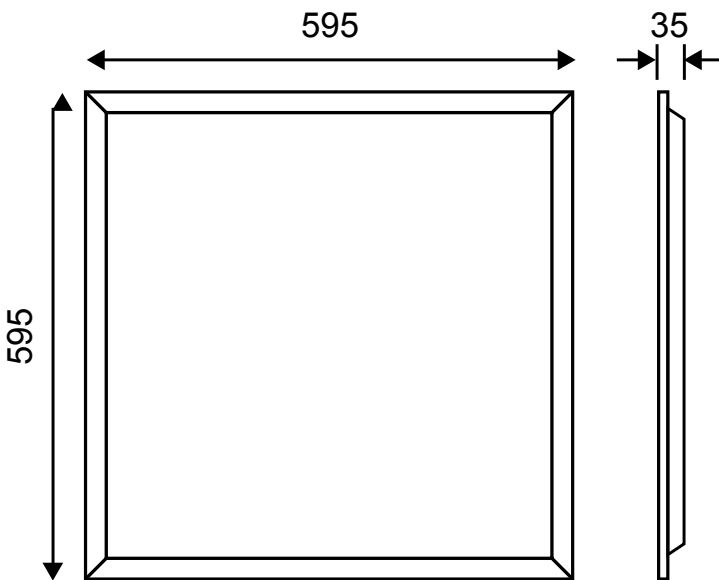

All dimension tolerances are ±0.5mm unless otherwise stated.

### ACCESSORIES

- Hanging Kit for suspended installation
- Spring Clips
- Surface Mounted Clips
- External 3hr Emergency Pack