
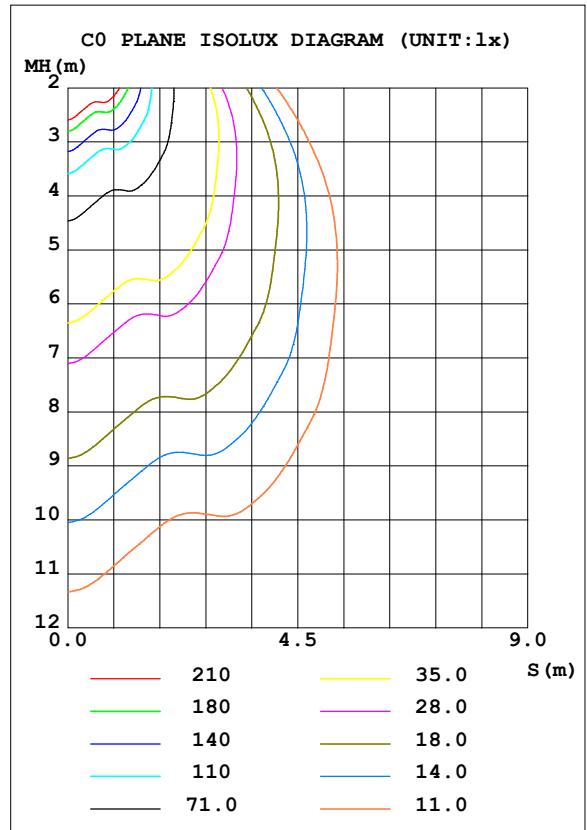


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:240.28V I:0.1321A P:29.855W PF:0.9408 Freq:50.00Hz Lamp Flux:3934.49x1 lm		
NAME: S29697	TYPE:LED NCF	WEIGHT:
SPEC.:29W 4000K	DIM.: 1800x96x79mm	SERIAL No.:
MFR.:	SUR.:1800x96mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 131.78 lm/W			
MODEL	S29697	I _{max} (cd)	1413	S/MH (C0/180)	1.23
NOMINAL POWER (W)	29.8554	LOR (%)	100.0	S/MH (C90/270)	1.24
RATED VOLTAGE (V)	240	TOTAL FLUX (lm)	3934.5	η UP, DN (C0-180)	1.3, 48.4
NOMINAL FLUX (lm)	3934.49	CIE CLASS	DIRECT	η UP, DN (C180-360)	1.4, 48.9
LAMPS INSIDE	1	η up (%)	2.7	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	240.283	η down (%)	97.3	CIBSE SHR MAX	1.35

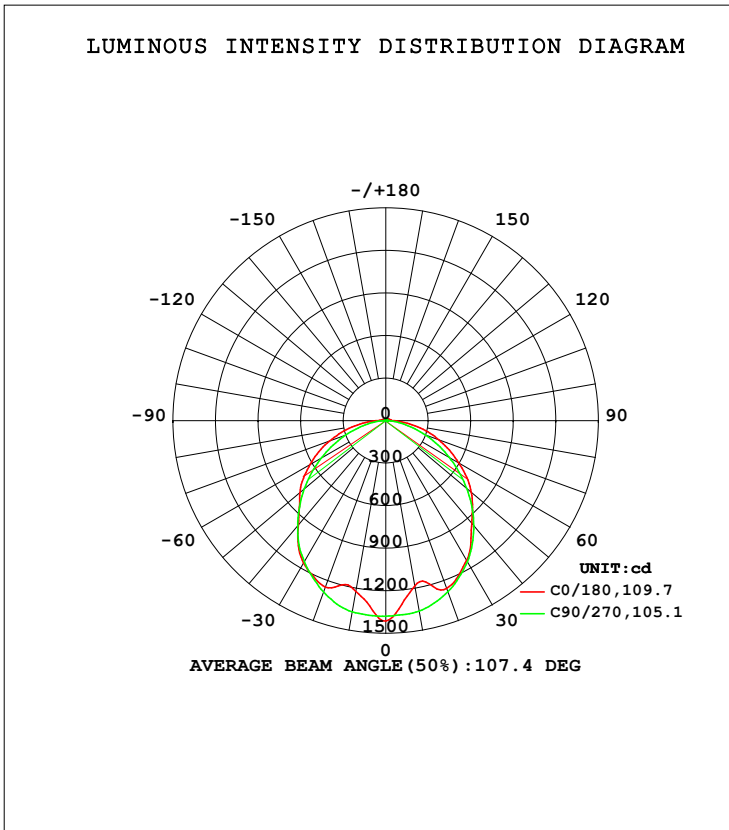

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2024-04-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 11.498m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	☉ zone	☉ total	lum, lamp
10	1183	1250	1364	1224	1223	1231	1368	1253	0- 10	125.2	125.2	3.18,3.18
20	1258	1133	1283	1163	1249	1156	1286	1109	10- 20	345.7	470.9	12,12
30	1139	1141	1151	1121	1160	1121	1149	1124	20- 30	547.0	1018	25.9,25.9
40	944.3	970.5	965.8	959.1	960.8	969.7	967.1	962.7	30- 40	661.3	1679	42.7,42.7
50	788.5	751.5	745.6	744.6	791.5	752.7	750.9	751.8	40- 50	663.4	2343	59.5,59.5
60	593.3	575.1	515.7	573.6	616.0	582.6	522.6	571.4	50- 60	594.8	2937	74.7,74.7
70	400.0	391.6	298.5	391.9	422.5	401.2	303.2	391.1	60- 70	466.7	3404	86.5,86.5
80	208.6	220.3	110.4	214.6	225.0	220.8	115.1	221.7	70- 80	297.8	3702	94.1,94.1
90	58.68	79.09	12.61	74.52	63.75	76.79	13.90	81.66	80- 90	126.1	3828	97.3,97.3
100	29.30	30.79	8.926	30.16	29.84	30.86	10.58	32.29	90-100	40.44	3868	98.3,98.3
110	24.87	19.36	7.288	19.57	24.85	20.44	8.253	21.45	100-110	22.65	3891	98.9,98.9
120	18.32	11.17	6.754	12.77	17.22	13.02	6.821	12.84	110-120	15.13	3906	99.3,99.3
130	12.96	8.254	6.487	8.396	11.71	8.722	6.445	8.956	120-130	9.410	3916	99.5,99.5
140	9.690	7.888	7.428	8.080	8.380	8.105	7.072	8.072	130-140	6.526	3922	99.7,99.7
150	8.847	8.247	8.138	8.330	8.080	8.121	7.881	8.004	140-150	5.102	3927	99.8,99.8
160	8.913	8.722	8.647	8.639	8.539	8.363	8.497	8.313	150-160	3.873	3931	99.9,99.9
170	9.313	9.122	9.072	8.964	9.197	8.813	8.989	8.797	160-170	2.491	3934	100,100
180	9.489	9.272	9.214	9.155	9.514	9.222	9.222	9.080	170-180	0.8725	3934	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-04-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:11.498m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.28V I:0.1321A P:29.855W PF:0.9408 Freq:50.00Hz Lamp Flux:3934.49x1 lm		
NAME: S29697	TYPE:LED NCF	WEIGHT:
SPEC.:29W 4000K	DIM.: 1800x96x79mm	SERIAL No.:
MFR.:	SUR.:1800x96mm	Shielding Angle:

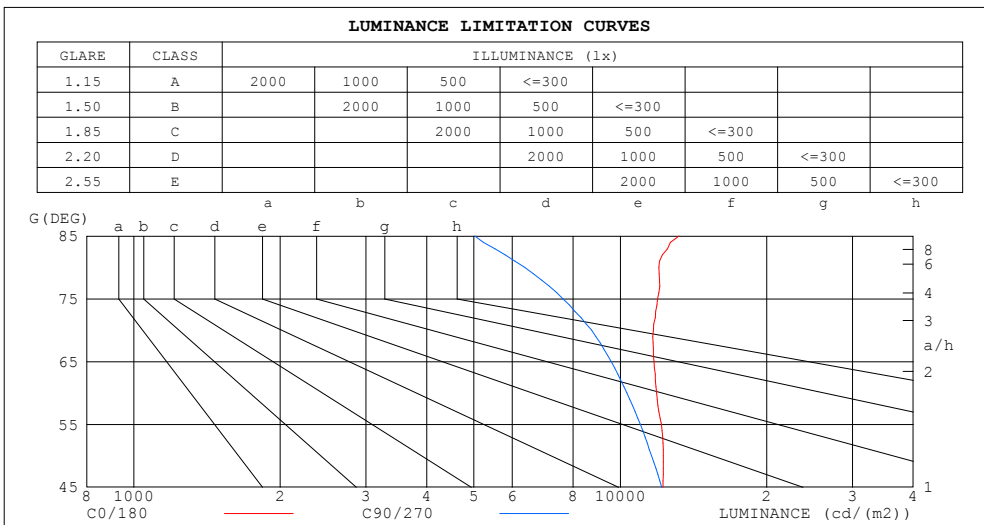

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	13211	5025
80	12011	6359
75	11931	7615
70	11696	8727
65	11730	9579
60	11867	10314
55	12150	10988
50	12267	11600
45	12247	12158


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-04-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:11.498m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.28V I:0.1321A P:29.855W PF:0.9408 Freq:50.00Hz Lamp Flux:3934.49x1 lm		
NAME: S29697	TYPE:LED NCF	WEIGHT:
SPEC.:29W 4000K	DIM.: 1800x96x79mm	SERIAL No.:
MFR.:	SUR.:1800x96mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																
pfc																
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.04	1.04	1.04	.00	.00	.00	.97
1.0	1.02	.98	.94	.00	.96	.92	.95	.92	.89	.91	.88	.85	.87	.84	.82	.80
2.0	.89	.82	.76	.87	.80	.75	.83	.77	.73	.79	.75	.71	.76	.72	.69	.66
3.0	.78	.70	.63	.76	.68	.62	.73	.66	.61	.70	.64	.59	.67	.62	.58	.56
4.0	.69	.60	.53	.67	.59	.53	.65	.57	.52	.62	.56	.51	.59	.54	.50	.47
5.0	.62	.52	.46	.60	.52	.45	.58	.50	.45	.56	.49	.44	.53	.48	.43	.41
6.0	.55	.46	.40	.54	.46	.40	.52	.45	.39	.50	.44	.38	.48	.43	.38	.36
7.0	.50	.41	.35	.49	.41	.35	.47	.40	.34	.46	.39	.34	.44	.38	.34	.32
8.0	.46	.37	.31	.45	.37	.31	.43	.36	.31	.42	.35	.30	.41	.35	.30	.28
9.0	.42	.34	.28	.41	.33	.28	.40	.33	.28	.39	.32	.27	.37	.32	.27	.25
10.0	.39	.31	.26	.38	.31	.25	.37	.30	.25	.36	.29	.25	.35	.29	.25	.23

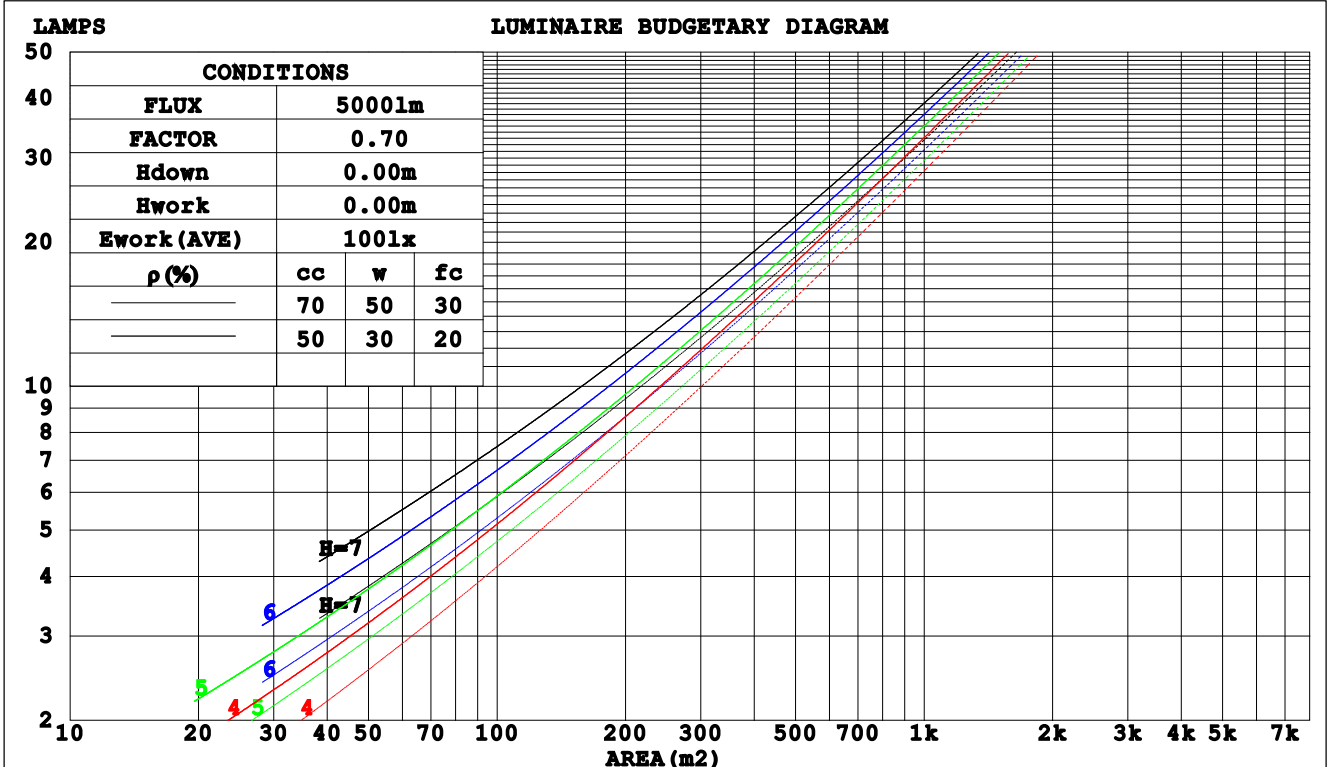

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-04-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:11.498m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:240.28V I:0.1321A P:29.855W PF:0.9408 Freq:50.00Hz Lamp Flux:3934.49x1 lm		
NAME: S29697	TYPE:LED NCF	WEIGHT:
SPEC.:29W 4000K	DIM.: 1800x96x79mm	SERIAL No.:
MFR.:	SUR.:1800x96mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.326	.185	.059	.318	.181	.058	.303	.174	.055	.289	.167	.054	.277	.160	.052	
2.0	.300	.164	.050	.293	.161	.050	.280	.155	.048	.267	.150	.047	.256	.145	.046	
3.0	.275	.146	.044	.269	.144	.043	.257	.139	.042	.246	.135	.041	.236	.131	.040	
4.0	.252	.131	.039	.247	.129	.038	.236	.125	.037	.226	.122	.037	.217	.118	.036	
5.0	.232	.118	.034	.227	.117	.034	.218	.113	.033	.209	.110	.033	.201	.107	.032	
6.0	.215	.108	.031	.210	.106	.031	.202	.104	.030	.194	.101	.030	.187	.098	.029	
7.0	.200	.099	.028	.196	.097	.028	.188	.095	.027	.181	.093	.027	.175	.091	.027	
8.0	.186	.091	.026	.183	.090	.025	.176	.088	.025	.170	.086	.025	.164	.084	.024	
9.0	.174	.084	.024	.171	.083	.023	.165	.082	.023	.159	.080	.023	.154	.078	.023	
10.0	.164	.079	.022	.161	.078	.022	.155	.076	.021	.150	.075	.021	.145	.073	.021	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.211	.211	.211	.180	.180	.180	.123	.123	.123	.071	.071	.071	.023	.023	.023	
1.0	.202	.177	.154	.173	.152	.132	.118	.104	.092	.068	.060	.053	.022	.019	.017	
2.0	.194	.153	.118	.166	.132	.102	.114	.091	.071	.066	.053	.042	.021	.017	.014	
3.0	.186	.135	.095	.160	.117	.082	.110	.081	.058	.063	.047	.034	.020	.015	.011	
4.0	.179	.122	.079	.153	.106	.069	.105	.074	.048	.061	.043	.029	.020	.014	.009	
5.0	.171	.112	.068	.147	.097	.059	.101	.068	.042	.059	.040	.025	.019	.013	.008	
6.0	.164	.104	.060	.141	.090	.052	.097	.063	.037	.056	.037	.022	.018	.012	.007	
7.0	.157	.097	.054	.135	.084	.047	.093	.059	.034	.054	.035	.020	.018	.011	.007	
8.0	.151	.091	.050	.130	.079	.044	.090	.055	.031	.052	.033	.018	.017	.011	.006	
9.0	.144	.086	.047	.124	.075	.041	.086	.052	.029	.050	.031	.017	.016	.010	.006	
10.0	.139	.082	.044	.120	.071	.038	.083	.050	.027	.048	.030	.016	.016	.010	.005	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-04-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:11.498m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.28V I:0.1321A P:29.855W PF:0.9408 Freq:50.00Hz Lamp Flux:3934.49x1 lm		
NAME: S29697	TYPE:LED NCF	WEIGHT:
SPEC.:29W 4000K	DIM.: 1800x96x79mm	SERIAL No.:
MFR.:	SUR.:1800x96mm	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	21.3	22.8	21.6	23.1	23.3	20.9	22.4	21.2	22.6	22.9
3H	23.0	24.4	23.4	24.7	25.0	22.3	23.6	22.6	23.9	24.2
4H	23.8	25.2	24.2	25.5	25.8	22.8	24.1	23.1	24.4	24.7
6H	24.5	25.8	24.9	26.1	26.4	23.1	24.3	23.5	24.7	25.0
8H	24.8	26.0	25.2	26.3	26.7	23.2	24.4	23.6	24.7	25.1
12H	25.0	26.2	25.4	26.5	26.9	23.2	24.4	23.6	24.7	25.1
4H 2H	21.9	23.2	22.3	23.5	23.9	21.6	22.9	22.0	23.2	23.5
3H	23.9	25.0	24.3	25.4	25.7	23.2	24.4	23.6	24.7	25.1
4H	24.8	25.9	25.2	26.2	26.6	23.9	24.9	24.3	25.3	25.7
6H	25.7	26.6	26.1	27.0	27.4	24.4	25.3	24.8	25.7	26.1
8H	26.0	26.9	26.5	27.3	27.8	24.5	25.4	25.0	25.8	26.2
12H	26.3	27.1	26.8	27.6	28.0	24.6	25.4	25.1	25.8	26.3
8H 4H	25.1	26.0	25.6	26.4	26.9	24.3	25.2	24.8	25.6	26.1
6H	26.2	26.9	26.7	27.4	27.9	25.1	25.8	25.5	26.2	26.7
8H	26.7	27.4	27.2	27.8	28.3	25.3	26.0	25.8	26.5	27.0
12H	27.1	27.7	27.7	28.2	28.7	25.5	26.1	26.1	26.6	27.1
12H 4H	25.2	26.0	25.6	26.4	26.9	24.4	25.2	24.9	25.7	26.1
6H	26.3	27.0	26.8	27.4	28.0	25.2	25.9	25.7	26.4	26.9
8H	26.9	27.4	27.4	27.9	28.5	25.6	26.2	26.1	26.7	27.2
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.1 / - 0.3					+ 0.1 / - 0.3				

CIE Pub.117, 3934 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 4.8)
 Area: 0.1 m2

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-04-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:11.498m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.28V I:0.1321A P:29.855W PF:0.9408 Freq:50.00Hz Lamp Flux:3934.49x1 lm		
NAME: S29697	TYPE:LED NCF	WEIGHT:
SPEC.:29W 4000K	DIM.: 1800x96x79mm	SERIAL No.:
MFR.:	SUR.:1800x96mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	56	45	38	56	44	38	54	44	37	31
0.80	66	54	47	65	54	47	63	53	46	39
1.00	74	63	56	73	62	55	71	64	55	47
1.25	81	71	63	80	70	63	77	68	62	54
1.50	86	76	69	85	75	68	81	73	67	59
2.00	93	84	77	91	83	77	87	80	75	66
2.50	97	89	83	95	87	82	91	84	79	71
3.00	101	93	87	98	92	86	94	88	84	75
4.00	105	99	94	102	97	92	97	93	89	79
5.00	107	102	98	104	100	96	100	96	92	82
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-04-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:11.498m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:240.28V I:0.1321A P:29.855W PF:0.9408 Freq:50.00Hz Lamp Flux:3934.49x1 lm		
NAME: S29697	TYPE:LED NCF	WEIGHT:
SPEC.:29W 4000K	DIM.: 1800x96x79mm	SERIAL No.:
MFR.:	SUR.:1800x96mm	Shielding Angle:

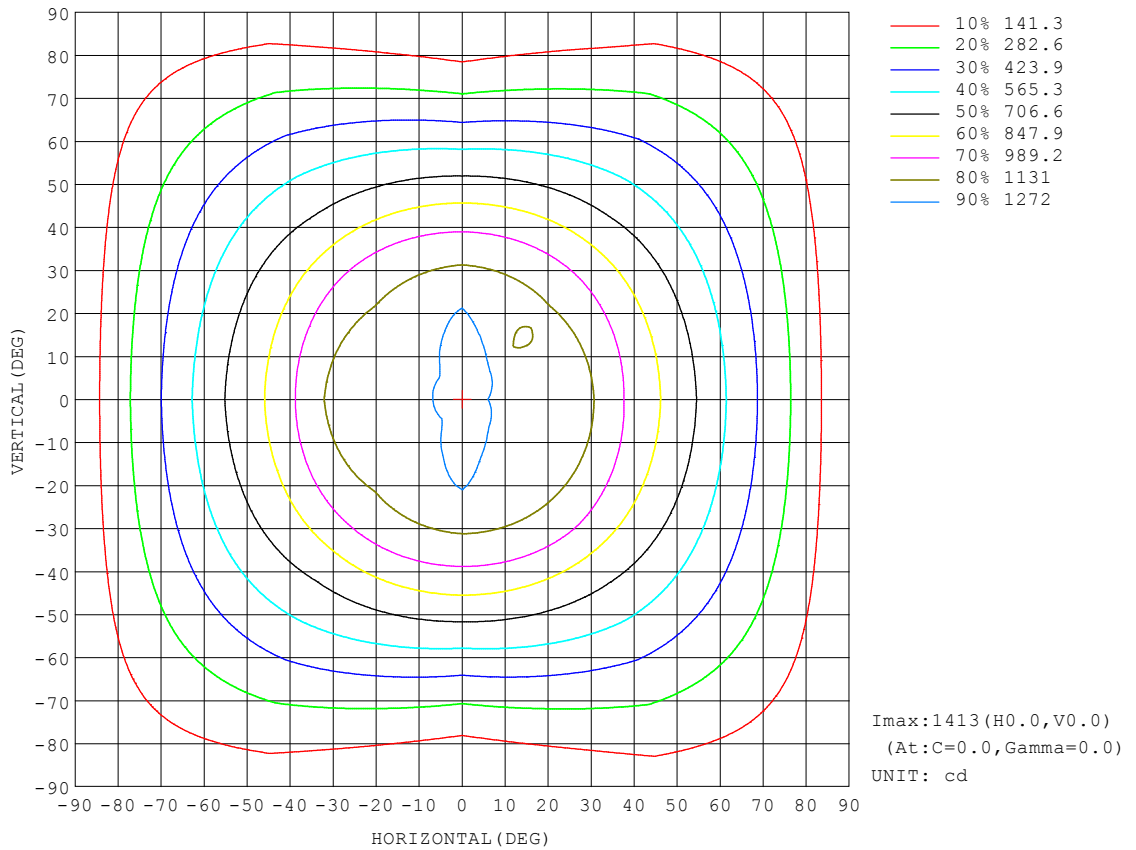


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-04-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:11.498m [K=1.0000]
 Remarks:

AAI Figure

Test:U:240.28V I:0.1321A P:29.855W PF:0.9408 Freq:50.00Hz Lamp Flux:3934.49x1 lm		
NAME: S29697	TYPE:LED NCF	WEIGHT:
SPEC.:29W 4000K	DIM.: 1800x96x79mm	SERIAL No.:
MFR.:	SUR.:1800x96mm	Shielding Angle:

Flux out:2469 lm

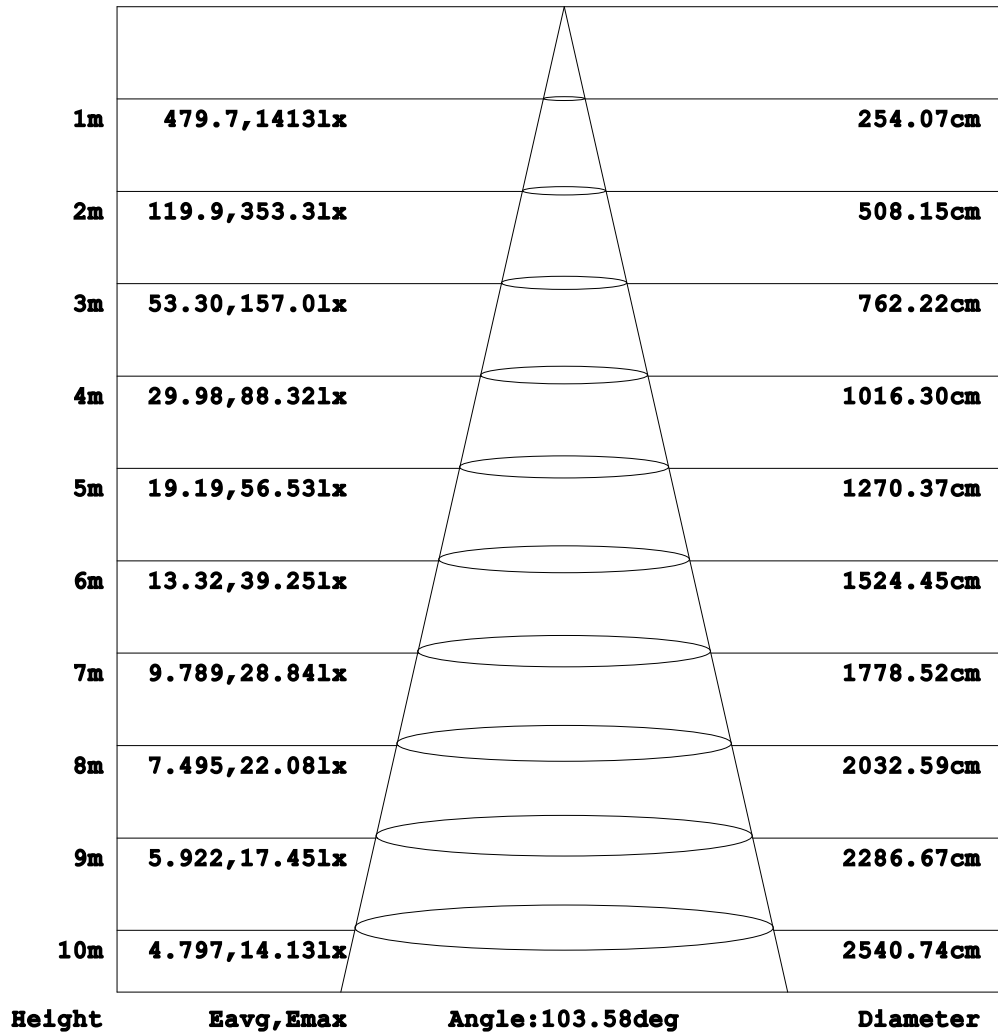


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-04-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:11.498m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:240.28V I:0.1321A P:29.855W PF:0.9408 Freq:50.00Hz Lamp Flux:3934.49x1 lm		
NAME: S29697	TYPE:LED NCF	WEIGHT:
SPEC.:29W 4000K	DIM.: 1800x96x79mm	SERIAL No.:
MFR.:	SUR.:1800x96mm	Shielding Angle:

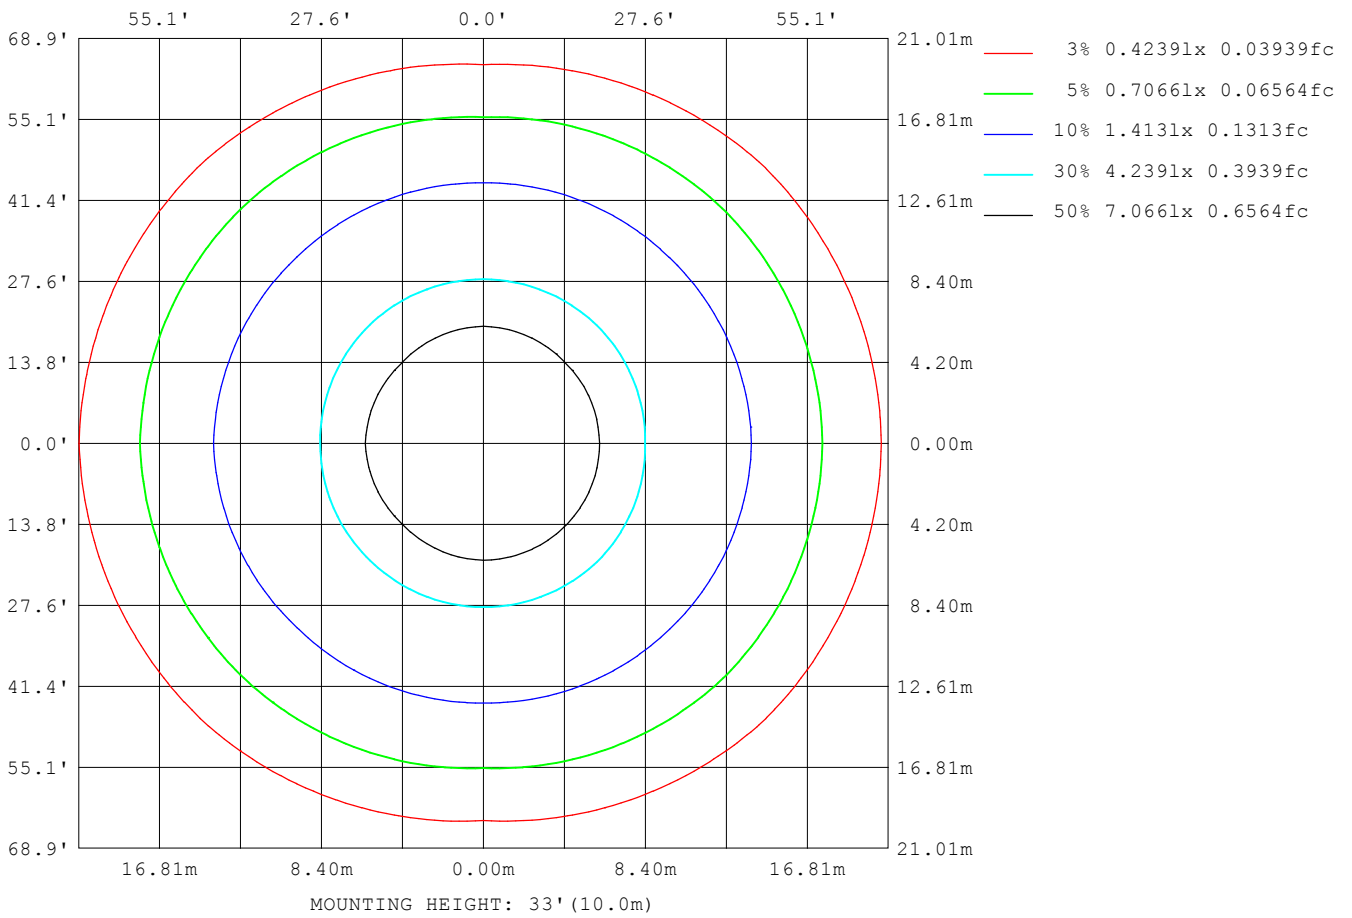

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-04-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:11.498m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:240.28V I:0.1321A P:29.855W PF:0.9408 Freq:50.00Hz Lamp Flux:3934.49x1 lm		
NAME: S29697	TYPE:LED NCF	WEIGHT:
SPEC.:29W 4000K	DIM.: 1800x96x79mm	SERIAL No.:
MFR.:	SUR.:1800x96mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	12057
L_0~180 (75) av	12237
L_0~180 (85) av	13990
L_90~270 (65) av	9636
L_90~270 (75) av	7724
L_90~270 (85) av	5216
L_45 (65) av	11451
L_45 (75) av	11769
L_45 (85) av	15843

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-04-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:11.498m [K=1.0000]
 Remarks:

Planar Illuminance Curve

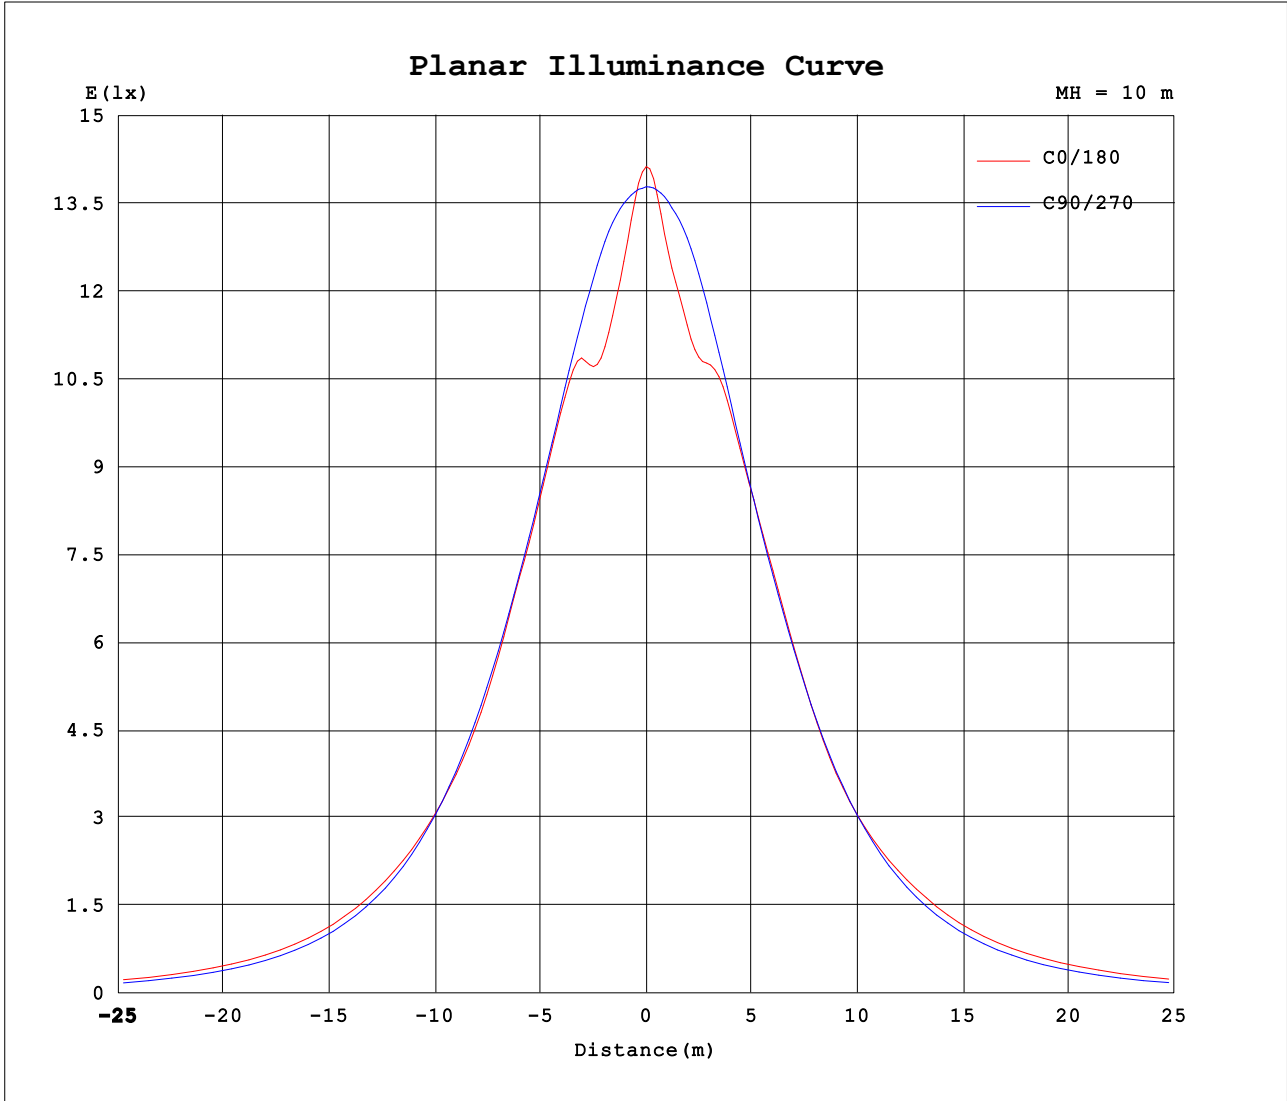

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2024-04-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 11.498m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:240.28V I:0.1321A P:29.855W PF:0.9408 Freq:50.00Hz Lamp Flux:3934.49x1 lm		
NAME: S29697	TYPE:LED NCF	WEIGHT:
SPEC.:29W 4000K	DIM.: 1800x96x79mm	SERIAL No.:
MFR.:	SUR.:1800x96mm	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	45	90	135	180	225	270	315										
0	1413	1401	1379	1390	1413	1401	1379	1390										
5	1301	1358	1374	1302	1313	1320	1377	1362										
10	1183	1250	1364	1224	1223	1231	1368	1253										
15	1192	1164	1330	1170	1198	1172	1339	1160										
20	1258	1133	1283	1163	1249	1156	1286	1109										
25	1210	1177	1222	1171	1211	1171	1220	1151										
30	1139	1141	1151	1121	1160	1121	1149	1124										
35	1048	1063	1065	1051	1077	1056	1070	1052										
40	944	971	966	959	961	970	967	963										
45	866	857	860	847	863	858	861	858										
50	789	752	746	745	792	753	751	752										
55	697	664	630	657	710	668	636	662										
60	593	575	516	574	616	583	523	571										
65	496	481	405	482	523	493	410	480										
70	400	392	298	392	423	401	303	391										
75	309	304	197	300	325	310	203	305										
80	209	220	110	215	225	221	115	222										
85	115	142	43.8	134	129	138	47.1	138										
90	58.7	79.1	12.6	74.5	63.8	76.8	13.9	81.7										
95	36.2	46.1	10.3	43.8	38.0	45.0	12.0	46.2										
100	29.3	30.8	8.93	30.2	29.8	30.9	10.6	32.3										
105	28.1	23.7	7.92	23.5	28.0	24.1	9.40	25.4										
110	24.9	19.4	7.29	19.6	24.9	20.4	8.25	21.4										
115	21.2	15.0	6.92	16.2	20.5	16.6	7.39	16.9										
120	18.3	11.2	6.75	12.8	17.2	13.0	6.82	12.8										
125	15.5	9.19	6.60	9.94	14.3	10.3	6.60	10.3										
130	13.0	8.25	6.49	8.40	11.7	8.72	6.45	8.96										
135	10.9	7.87	6.95	8.06	9.68	8.26	6.61	8.41										
140	9.69	7.89	7.43	8.08	8.38	8.10	7.07	8.07										
145	9.20	8.01	7.82	8.21	8.10	8.10	7.49	7.94										
150	8.85	8.25	8.14	8.33	8.08	8.12	7.88	8.00										
155	8.81	8.48	8.45	8.46	8.27	8.15	8.22	8.14										
160	8.91	8.72	8.65	8.64	8.54	8.36	8.50	8.31										
165	9.09	8.94	8.87	8.81	8.84	8.59	8.76	8.55										
170	9.31	9.12	9.07	8.96	9.20	8.81	8.99	8.80										
175	9.45	9.22	9.21	9.13	9.36	9.07	9.15	8.93										
180	9.49	9.27	9.21	9.16	9.51	9.22	9.22	9.08										

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-04-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:11.498m [K=1.0000]
 Remarks: