

Energizer®

SMART FLOODLIGHT

1. APP QUICK START GUIDE

Ensure your phone is connected to WiFi 2.4GHz Wifi Network Only
Download the 'Energizer® SMART' App from the App Store (IOS) or Google Play (Android)



2. REGISTER/LOG IN

- Open the 'Energizer® SMART' App
See/scan the QR code (Right)



• Register

For a new account on the 'Energizer® SMART' App


• Log In

If you already have an existing Energizer account




3. ACCOUNT DETAILS

- Enter your e-mail address
- Verify your account via the code sent to the above
- Enter verification number
- Enter a secure password
- 'Create Family' - Enter family name & location

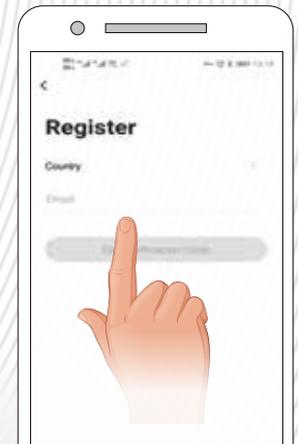


4. INSTALLATION


- Turn off power at mains
- Loosen the bracket

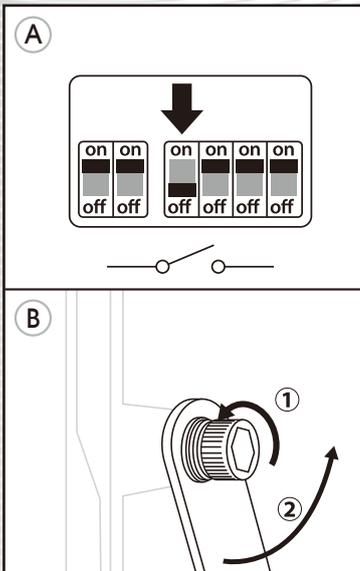


- Mark fixing location
- Drill the holes (avoiding any concealed pipes/wires)

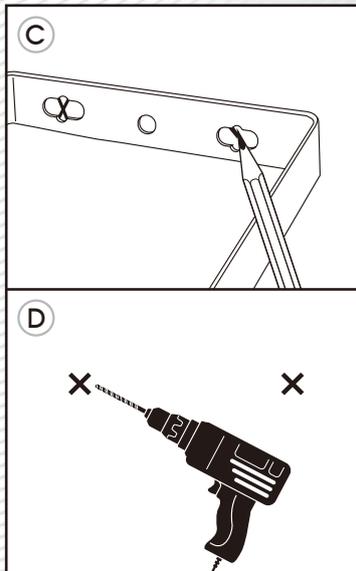


- Insert plugs and fix in place with screws supplied
- Remove Quick Fit IP65 Connector end

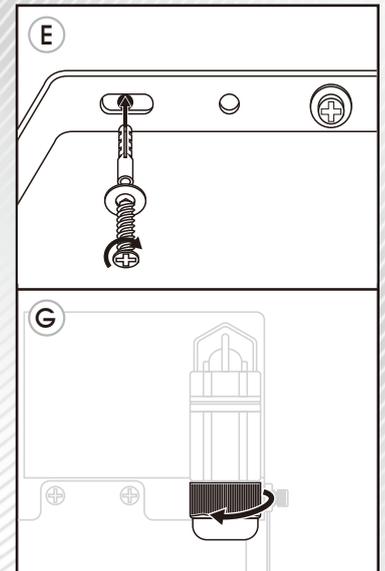


- Slide out junction box
- Place connector end over the incoming supply

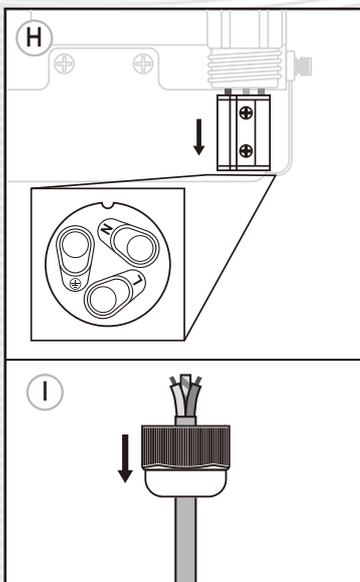

- Wire the fitting as below (Ensure waterproof)
- Slide junction box into the housing and replace the Quick Fit IP65 connector end

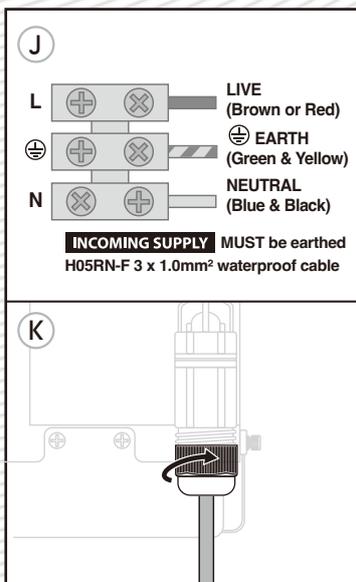

- Turn on power at the mains
- Position PIR to the front using a pendulum motion. DO NOT TWIST as this will result in limited horizontal adjustment

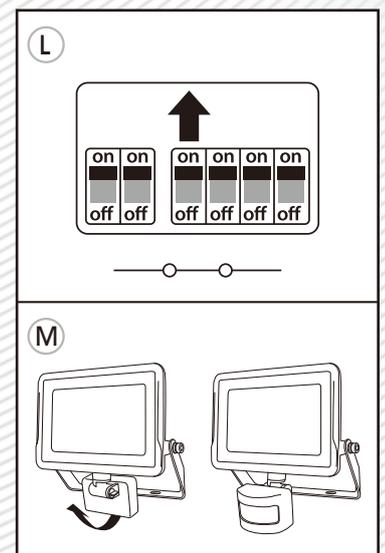

5. ADDING DEVICES

- Add device **+** (Top Right)
- Select "Floodlight" from the picture menu
- WiFi name and password may be required - These are commonly found on your router
- A status % window will display until connected
- Repeat the above for additional devices

NOTE - If unsuccessful repeat the steps above



6. FLOOD FUNCTION - WHITE

- Once added you can name your device via the **•••** icon

ON/OFF

White:

- Tunable White
- Warm White to Daylight
- Brightness: 1% to 100%



7. FLOOD FUNCTION - PIR

- Once added you can name your device via the **•••** icon

ON/OFF

Motion Detection:

- High
- Middle
- Low

Full Light Duration:


- 5 seconds < on >
- 60 minutes

Intelligent Linkage:

See section 8


Induction Recording Setting:

- Luminance detection
- Slight bright on/off

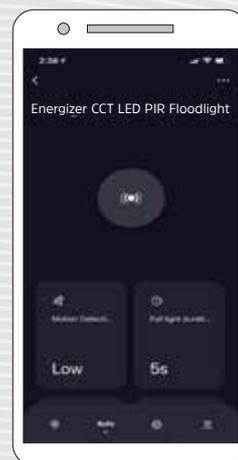

8. FLOOD FUNCTION - INTELLIGENT LINKAGE

- From the 'Intelligent linkage' screen go to the **+** symbol
- From here you can select and Add Task
- Run the device. The sensor can trigger an existing 'Energizer® SMART' product to activate when the sensor is triggered - e.g. Turn light ON for a set period when the PIR sensor is activated. Turn light of OFF after a set period of inactivity.
- Select smart scenes
- Send notifications
- Delay an action

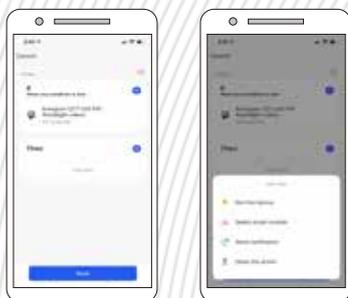

9. FLOOD FUNCTION - SCHEDULE

- Once added you can name your device via the **•••** icon

Schedule:

Power Switch:

- Set device to come ON or OFF or PIR

Repeat:

- Choose the days of the week



10. FLOOD FUNCTION - COUNTDOWN

- Once added you can name your device via the **•••** icon


Countdown:

- Set a timer to turn the device off



11. CREATING GROUPS

- Create Group (Minimum 2 Devices)
- Select edit icon **•••**
- Select "Create Group" in the options
- Add all available devices shown for the group
- The group will now be visible on the HOME screen
- Select group and edit via the **•••** symbol where you can add, remove, rename or dismiss group

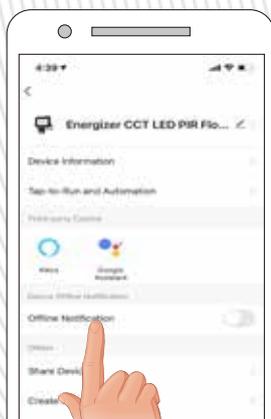

TROUBLESHOOTING

Q: Why is the device not pairing?

1. Ensure your mobile is connected to a 2.4GHz WiFi network
2. Ensure password is entered correctly and the same WiFi network is used on your mobile
3. Ensure smart device is in pairing mode (blinking)
4. Check your WiFi network connection by accessing a website

Q: Is my WiFi network under 2.4GHz?

1. Refer to your router specification.
2. All routers will emit at least 2.4GHz - dual band routers will emit 5.0GHz in addition to 2.4GHz

Q: Does my smart device support 5GHz wireless connections?

A: No. Device does not support 5GHz wireless connection

Q: What if I forget my App account password?

A: Tap forgot password and type in Energizer Smart registered account to get verification code to reset password

Q: When pairing - should my device & mobile phone be in the same room as the WiFi router?

A: No. They do not need to be in the same room but ensure they are connected to the same WiFi network

Q: When registering an account the app tries to load but does not progress to the next page

1. Navigate the Settings menu
2. Find the App and ensure data usage has been enabled

Energizer®

UK
CA
220-240V / 50-60Hz



3000K 6500K

Tunable White

16 Million Colours

Powered by
tuya

Hereby, SUPREME PLC declares that the radio equipment type ENERGIZER SMART is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: supreme.co.uk/energizersmart/eu-doc/

©2021 Energizer. Energizer and certain graphic designs are trademarks of Energizer Brands, LLC and related subsidiaries and are used under license by Supreme PLC. All other brand names are trademarks of their respective owners. Neither Supreme PLC nor Energizer Brands, LLC is affiliated with the respective owners of their trademarks. Google, Google Play and Google Home are trademarks of Google LLC. Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates.